

WMA-5

CO₂ Gas Analyzer

With Optional H₂O & O₂ Measurement

The WMA-5 is designed for accurate, reliable and continuous measurement of CO₂. It is extremely easy to set up and install and our innovative "Auto-Zero" technology ensures long term stability, accuracy and calibration. The WMA-5 requires minimal maintenance without the need for factory recalibration that saves both time and money.

Product Features

- High precision, compact, non-dispersive infrared gas analyzer for CO₂
- Accuracy: < 1% over calibrated CO₂ range
- CO₂ ranges up to 100000 ppm (10%)
- Automatic pressure and temperature compensation
- Numeric and graphical display of data
- Convenient data storage and transfer via USB flash drive
- Operation from AC or DC power inputs
- Large touch display with excellent readability
- Built-in air sampling pump and electronic flow sensor
- Voltage, current, and digital output
- External water trap
- Rugged IP65 enclosure
- Audible and visual alarms/warnings
- Low power consumption
- Available options include:
 - H₂O sensor (Solid state)
 - O₂ sensor (Electrochemical cell)
 - WiFi




WiFi Optional


For users who demand accuracy, reliability and long term stability

Applications


- Plant growth chambers
- Environmental control rooms
- Incubators
- Fruit storage
- FACE sites
- Breweries
- Indoor air quality and safety
- Industrial monitoring
- CO₂ leakage detection
- Ambient air monitoring

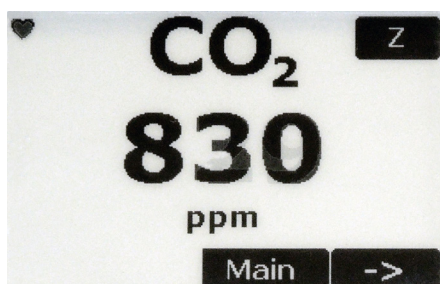

Main display for CO₂

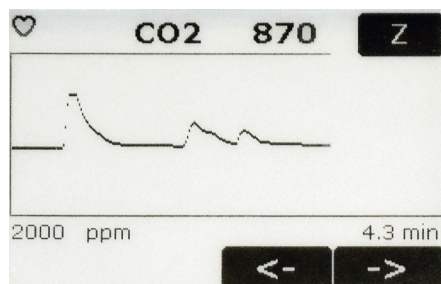


Graphical display for monitoring CO₂ history/trends

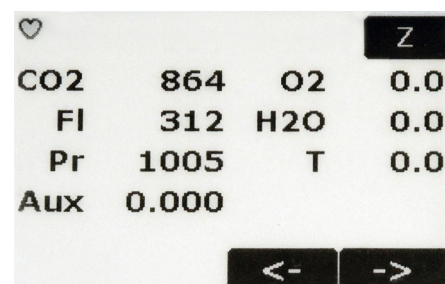

Monitor CO₂, H₂O and O₂ from one display


GAS Software

Our **GAS** (Gas Analysis Software) software package is available for use with the WMA-5 for monitoring, logging and recording environmental sensor data.

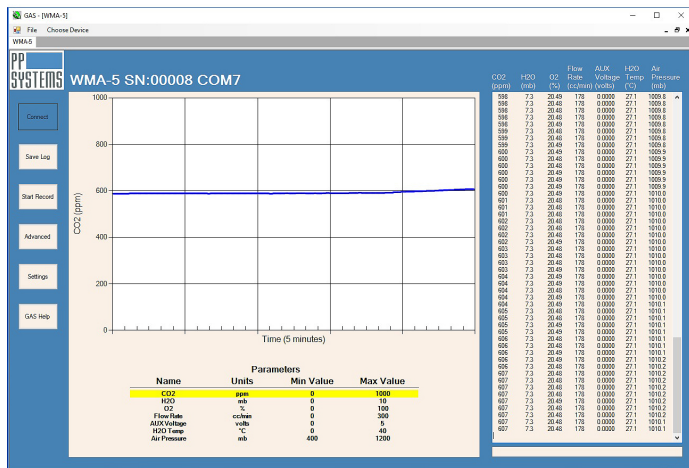

WiFi Optional

Monitor the WMA-5 remotely from your computer or smartphone browser in real-time with our WiFi option.

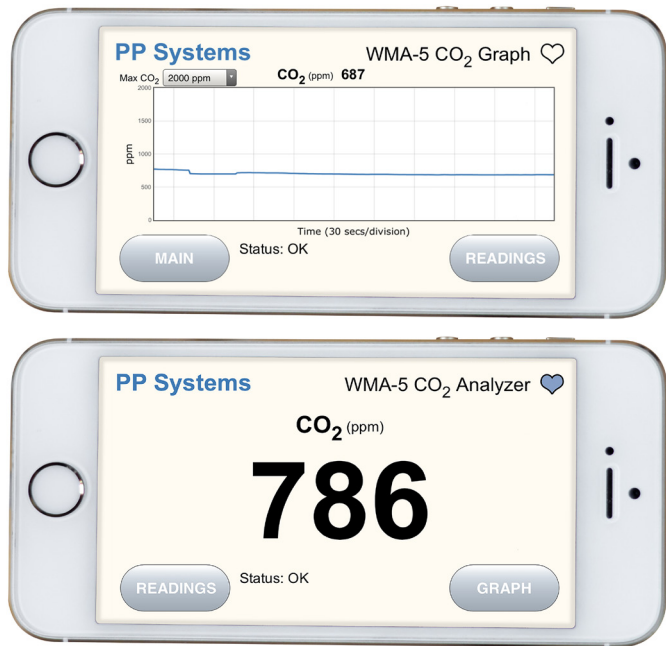

For further information, please contact us at:

PPSystems™
110 Haverhill Road, Suite 301
Amesbury, MA 01913 U.S.A.
TEL +1 978-834-0505
FAX +1 978-834-0545
EMAIL sales@ppsystems.com



- PP Systems is a registered trademark of PP Systems, Inc.
- PP Systems is continuously updating its products and reserves the right to amend product specifications without notice.
- All brand names are trademarks of their respective owners.

Technical Specifications

Analysis Method	Non-dispersive infrared, configured as an absolute absorptometer with microprocessor control of linearization
CO₂ Measurement Ranges <i>Please specify at time of order</i>	0-1000 ppm (μmol mol ⁻¹) 0-2000 ppm (μmol mol ⁻¹) 0-5000 ppm (μmol mol ⁻¹) 0-10000 ppm (μmol mol ⁻¹) 0-20000 ppm (μmol mol ⁻¹) 0-30000 ppm (μmol mol ⁻¹) 0-50000 ppm (μmol mol ⁻¹) 0-100000 ppm (μmol mol ⁻¹) Readings are automatically corrected for temperature and pressure.
Pressure Compensation Range	55–115 kPa
Accuracy	< 1% of span concentration over the calibrated range but limited by the accuracy of the calibration mixture
Linearity	< 1% throughout the range
Stability	Auto-Zero at regular intervals corrects for sample cell contamination, source and detector aging and changes in electronics.
Warm-up Time	Approximately 15 minutes
Sampling Rate	10 Hz. Sample data is averaged and output every 1.0 seconds.
Sampling Pump	Integral, long life 12V air sampling pump
Gas Flow Rate	200-500 cc/min (280-340 cc/min is optimal). An internal electronic flow sensor monitors flow rate.
Terminal Block	22 pin terminal block for system inputs and outputs
Analog Output	0–2.5V (CO ₂ range selectable) and 4-20mA
Digital Output	RS232 and USB
Air Filter & Water Trap	An external water trap and internal hydrophobic filter are used to protect the system from water ingestion.
Alarm	Visual and audible alarm/warnings 2 relay contacts (Alarm1 and Alarm2)
CO₂ Control	High and low user set points
Data Storage (USB)	USB Flash Drive for data storage in multiple formats
Display	2.7" electronic paper touch display with 264 x 176 pixel resolution
Power Requirements	12 VDC, 1.5A or 100-240 VAC, 50-60 Hz, 0.6A (AC Adapter included)
Power Consumption	Warm up: 12W (12V @ 1.0A) Normal operation: 6W (12V @ 0.5A)
Enclosure	High impact, IP65 enclosure
Gas Connections	Two barbed fittings (inlet and exhaust) for use with 1/8" (.125") ID tubing
Operating Temperature	0-50 °C, non-condensing External filtration is recommended in dirty/dusty environments.
Dimensions	21.3 cm (L) x 18.5 cm (H) x 11.4 cm (W) (Enclosure only)
Weight	1.5 kg
Optional Accessories	• H ₂ O Sensor • O ₂ Sensor • WiFi